
## specifications




## PG250HCr-2

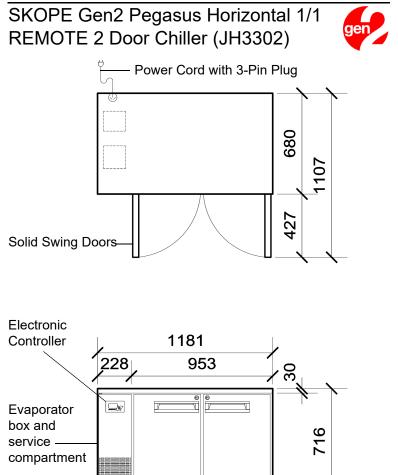

CABINET DIMENSIONS		
	External	Internal
Height:	716mm*	570mm
Width:	1181mm	833mm
Depth:	680mm	545mm
Floor area:	0.80m <sup>2</sup>	

\* Height excludes castors, legs or optional worktop.

Dimensional toler Before installing thi following dimension	s cabinet allow the
Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm
Length of multiple	e cabinets
At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm



Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS		
Refrigeration system:	Electronic controlled, side mounted, remote refrigeration unit	
Refrigerant:	Thermostatic expansion valve fitted to suit R134a/R404A/R452A	
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"	
Remote refrigeration duty:	360 Watts	
Cabinet internal volume:	260 litres	
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam	
Cabinet temperature range:	+1°C to +4°C up to 43°C ambient	
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)	
Electrical:	230-240 Volts a.c. 50 Hz, 0.46 Amps	
Internal lighting:	1 x 5W T8 LED tube (Ø26 x 360mm) - Door activated	
Internal door opening size:	2 door openings: 570mm high x 365mm wide	
Doors:	Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged	
Worktop (optional):	Optional 35mm stainless steel worktop with 65mm square edged fascia	
Shelves:	Two levels of non-tip, adjustable tray slides and/or shelves per door	
Weight:	115 kg	

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0178 Rev 2.2 Nov. 2019



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.co.nz